

User Guide

DAB & FM Radio

with clock, alarm and snooze functions



Now you have purchased a MAXTEK® product you can rest assured in the knowledge that as well as your 3 year parts and labour warranty, you also have the peace of mind of a dedicated helpline and online support

AFTER SALES SUPPORT



GB 01270 508538 IRE 1800 995 036



www.quesh.co.uk

MODEL NUMBER: 53726

• DAB & FM Radio

• Power adaptor

3
YEARS
WARRANTY

Contents

- 1. Welcome Section
- 2. General Information & Safety Instructions
- 3. Contents & Features
- 4. Controls & Radio Icons
- 5. Instructions
- 6. Select DAB or FM
- 6. DAB Tuning
- 7. FM Tuning
- 7. Storing & Using Presets
- 8. Setting the Clock Manually
- 8. Alarm Mode
- 10. Setting the Sleep Function
- 10. Reset
- 11. FAQ

AFTER SALES SUPPORT	
 GB 01270 508538	IRE 1800 995 036
 www.qesh.co.uk	
MODEL NUMBER: 53726	

- DAB & FM Radio
- Mains Adaptor

3
YEARS
WARRANTY

Welcome Section

Congratulations!

You have made an excellent choice with the purchase of this quality MAXTEK® product.

By doing so you now have the assurance and peace of mind which comes from purchasing a product that has been manufactured to the highest standards of performance and safety, supported by the high quality standards of Quesh.

We want you to be completely satisfied with your purchase so this MAXTEK® product is backed by a comprehensive manufacturer's 3 year warranty and outstanding after sales service through our dedicated helpline.

We hope you enjoy using this product for many years to come.

If you require technical support or in the unlikely event that your purchase is faulty, please telephone our helpline for immediate assistance. Faulty product claims made within the 3 year warranty period will be repaired or replaced free of charge provided that you have a satisfactory proof of purchase (keep your receipt safe). This does not affect your statutory rights. However be aware that the warranty will become null and void if the product is found to have been deliberately damaged, misused and/or disassembled.

AFTER SALES SUPPORT	
 GB 01270 508538 IRE 1800 995 036	• DAB & FM Radio • Mains Adaptor
 www.quesh.co.uk	
MODEL NUMBER: 53726	




General information & Safety Instructions


This DAB radio can be powered by 6 x 'AA' batteries.

Do not dispose of batteries in your household waste.

Please contact your local authority for details on safe disposal.



- Never throw batteries into a fire or expose to excessive heat source(s).
- If batteries are swallowed, please seek immediate medical attention.
- Always ensure correct +/- battery polarity when installing batteries.
- Do not recharge non-rechargeable batteries.



Electrical and electronic equipment (WEEE) contains materials, parts and substances, which can be dangerous to the environment and harmful to human health if the waste of electrical and electronic equipment (WEEE) is not disposed of correctly.

Equipment, which is marked with the WEEE logo (as shown on the left), should not be thrown away with your household waste. Contact your Local Authority Waste Disposal Department, as they will be able to provide details of the recycling options available in your area.

AFTER SALES SUPPORT



GB 01270 508538 IRE 1800 995 036



www.qesh.co.uk

MODEL NUMBER: 53726

• DAB & FM Radio

• Mains Adaptor

3

YEARS
WARRANTY

Contents & Features


Contents

- 1 x DAB / FM radio
- 1 x 9v mains adaptor
- 1 x User manual


Features

- DAB band 3 reciever
- FM reciever
- Powered by 6 x AA alkaline batteries (not included)
- 9v Mains Adapter (included)
- Clock
- 2 programable alarms
- Snooze function
- Sleep function


Controls

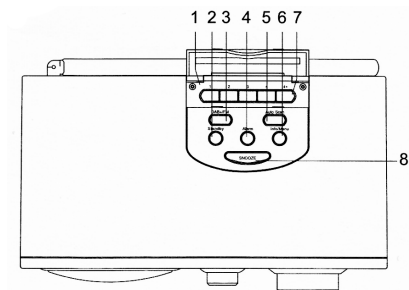

1. Preset Keys (1-4 / 5-8)
2. Standby
3. DAB/FM Key
4. Alarm Key
5. Auto Scan
6. Info/Menu Key
7. 4+ Key
8. Snooze Key

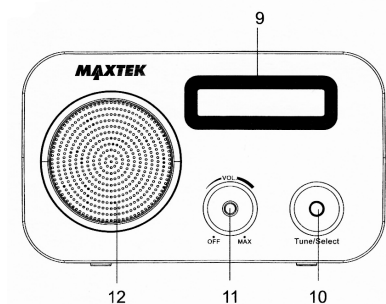

9. LCD Display
10. Tune/Select Dial
11. Power/Volume Dial
12. Speaker

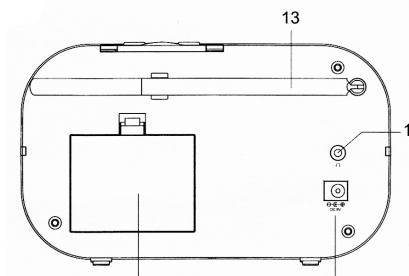

13. Telescopic Antenna
14. 3.5mm Headphone Socket
15. DC Power Socket
16. Battery Door (6 x AA Size Batteries)

Radio Icons

Signal Strength

DAB Selected

FM Selected



Alarm 1 set

Alarm 2 set

Snooze Active

Instructions

Switching your radio on for the first time

- Connect the mains adaptor to the mains outlet and to the DC port on the radio.
- Fully extend the aerial as far as it will go.
- The radio will display the 'Welcome' message.



WELCOME

- The radio will now auto tune, as you will see on the LCD display.



TUNING

- The radio will check and set the time via DAB. This can take up to 10 seconds to complete.
- After the clock is set the radio will continue to scan for DAB stations. You will see the amount of stations found indicated by a number on the right. This can take up to 2 minutes to complete.



DAB \ / \ / \ / \ / \ / \ / \ / \ / 10

- Once the radio have successfully completed the auto tune, the radio will display the first alphanumerically station found.



DAB ABSOLUTE

- If there is no DAB signal, or the scan is cancelled by using the 'Tune/Select' dial the LCD will display 'Off Air'. The time will also be set incorrectly as the scan has been cancelled.



OFF AIR

- To explore the stations found you need to turn the 'Tune/Select' dial clockwise or anti clockwise. You will skip through the stored channels the radio has found. When you find a station you want to listen to press the 'Tune/Select' dial in to select it.
(N.B. The 'Tune/Select' dial is double action, twist to tune and press to select)
- The radio will continue to play the last channel selected once it has been turned on again after being turned off.

Select DAB or FM

- Press the 'DAB/FM' to change between DAB and FM modes. An icon on the display will indicate which mode the radio is in.



DAB
FM

DAB Tuning

Signal strength

- The radio will display the strength of signal you are receiving. The more bars shown the stronger the signal.



Signal strength icon (four bars)

Auto scan / Full auto scan

- To scan local band 3 DAB stations press the 'Auto Scan' button and allow the radio to complete a scan.
- To scan all UK band 3 DAB stations press and hold the 'Auto Scan' button and allow the radio to complete a full scan.

Manual tuning

- Press and hold 'Info/Menu' till Manual appears on the screen and then press the 'Tune/Select' dial to select it.
- Turn the 'Tune/Select' dial to finely tune the signal. The DAB band channels are numbered 5A through to 13F

FM Tuning


Auto Scan

- While in FM mode pressing the 'Auto Scan' button will search the FM band upwards and stop at the next strong signal FM radio station.

Manual tuning

- While in FM mode turn the 'Tune/Select' dial in either direction to manually tune or adjust the signal.

Storing & Using Presets



Storing presets 1 to 4

- Once you have found a station you wish to save press and hold any of the 1 to 4 buttons till the display flashes 'P#SAVED' and returns to the name of the station currently selected.



Storing presets 5 to 8

- Once you have found a station you wish to save on preset 5 to 8 position, press '4+' and the display will show 5-8.



- Press and hold 1 to 4 buttons as before to save the preset on 5 to 8 positions (1=5, 2=6, 3=7 & 4=8).



Selecting a stored preset

- For stations stored on presets 1 to 4, press the corresponding button to recall the saved station. The display will flash with 'P# LOAD' and then display the stations name.



- For stations stored on presets 5 to 8, press the '4+' button followed by the corresponding 1 to 4 (1=5, 2=6, 3=7 & 4=8).

Setting the Clock Manually

- If the clock has not been automatically set via the DAB signal then press and hold 'Info/Menu' till 'Manual' is displayed, then press the 'Info/Menu' button till 'Clock' appears. Press the 'Tune/Select' dial to select 'Clock'.



- Turn the 'Tune/Select' dial to set the hour (24hr format) and press the 'Tune/Select' dial to confirm and move on to the minutes.
- Once on the minutes, use the 'Tune/Select' dial as before and press the dial to confirm the minutes.

Alarm Mode

Setting the alarm

- To set the alarm press the 'Alarm' button and 'Alarm 1' will show on the display. Turn the 'Tune/Select' dial to select either alarm 1 or 2 and press the 'Tune/Select' dial to confirm your selection.



- Once you've selected the alarm you wish to set turn the 'Tune/Select' dial to set it to either 'OFF', 'DAILY' or 'ONCE' and press the 'Tune/Select' dial to confirm selection.



- After you've selected which mode you want to set the alarm in, turn the 'Tune/Select' dial to set the hour (24hr format) and press the 'Tune/Select' dial to confirm and move to the minutes and repeat the process.
- Once you have confirmed your time you now need to select the type of alarm alert. You can choose from buzz, DAB or FM stations from turning then pressing the 'Tune/Select' dial. The alarm will only use the last station tuned in with either DAB or FM and at the same volume level you left the dial at.



- To turn the alarm alert off press the 'Standby' button or press the 'Snooze' button to activate the alarm snooze function.
- To disable the alarm, press 'Alarm', select which alarm you want to disable and select 'OFF' instead of 'DAILY' or 'ONCE'.

Snooze Function

- Pressing the 'Snooze' after the alarm goes off it will delay the alarm for 5 minutes each time. The alarm duration is 1 hour

Sleep Function

Setting the sleep function

- Press 'Info/Menu' button till manual appears on the display the press the 'Info/Menu' till 'SLEEP' is displayed and press the 'Tune/Select' dial to select it.



- Turn the 'Tune/Select' dial to find the duration of the sleep timer required or to disable it by choosing 'OFF'. The timer moves in 5 minute increments. Press the 'Tune/Select' dial to confirm the selection.
- The radio will display a count down till it turns it's self off.

System Reset

- Make sure the unit is in DAB mode by checking the display icon.
- Press and hold the 'Info/Menu' button till 'MANUAL' appears the press it again till you see 'RESET' and then press 'Tune/Select' to confirm.



- The unit will reset and retune it's self as if it was the first time.

Information Display

- Pressing the 'Info/Menu' button in any radio mode will display the time, National or Local, Frequency and sleep mode.

FAQ

Signal not available

- Where the radio cannot receive a DAB signal it will display 'OFF AIR'. This is either due to a weak signal or no coverage.



OFF AIR

- Please make sure the aerial is fully extended.
- Try the reset function on page 10 or unplugging the unit for 4 hours if you are sure you are receiving signal.

Radio didn't auto tune for the first time

- Make sure the radio is in DAB mode and press 'Auto Tune'.

The clock didn't automatically set

- See page 8, setting the clock manually.

DAB channel is stuck

- Try the reset function on page 10 or unplugging the unit for 4 hours.

How long do the batteries last?

- The 6 x AA batteries last between 4-5 hours.

My alarm didn't go off

- The alarm will only go off if the radio is in standby by mode.



Warranty Card

DAB & FM Radio

53726

Please keep your purchase receipt together with your warranty card

Name: _____

Address: _____

 _____

Date of purchase: _____

Location of purchase: _____

Detailed description of malfunctions:

SERVICE HELPLINE

Quesh Ltd, 1 Solway Court, Crewe Business Park, CW1 6LD
UK/N.Ireland 01270 508538, Rep. Ireland 1800 995 036
web: www.quesh.co.uk

AFTER SALES SUPPORT



GB 01270 508538 IRE 1800 995 036



www.quesh.co.uk

MODEL NUMBER: 53726

• DAB & FM Radio

• Mains Adaptor

3

YEARS
WARRANTY

